


# Access Quattro

Access Quattro fits onto any standard electrical socket. The reader is available with most common interfaces and with 125 kHz, 13.56 MHz and Mifare® technologies, as Access 7 A, Access 7 C, Access 8CM or Access 9CM r/w reader versions.

Access Quattro consists of a basic reader and a customizable snap-on cover. The reader combines comprehensive technical features with an exclusive and individual design.

The reader is available in customized colors and company logos.

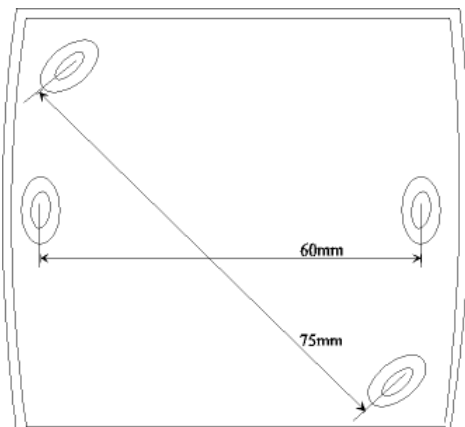

## SPECIFICATION

### Available models:

- Access 7 A
- Access 7 C
- Access 8 CM
- Access 9 CM

### Power supply Interfaces

Depends on the module  
Wiegand, Clock&Data, RS232,  
RS422 (Access 7 C Quattro)

### Material of design housing

Plastic

### Dimensions of housing

86 x 86 x 16,5 mm

### Operating temperature

-40...+55 °C

### Storage temperature

-40...+55 °C

### Field strength

According to EN300330

### EMC

Meets CE requirements

Idesco Oy reserves the right to revise this publication and to make changes to its content as well as the right to change or discontinue these products, at any time, without obligation to notify any person or entity of such revisions or changes. All trademarks and registered trademarks are property of their respective owners. Printed in Finland 06/2004